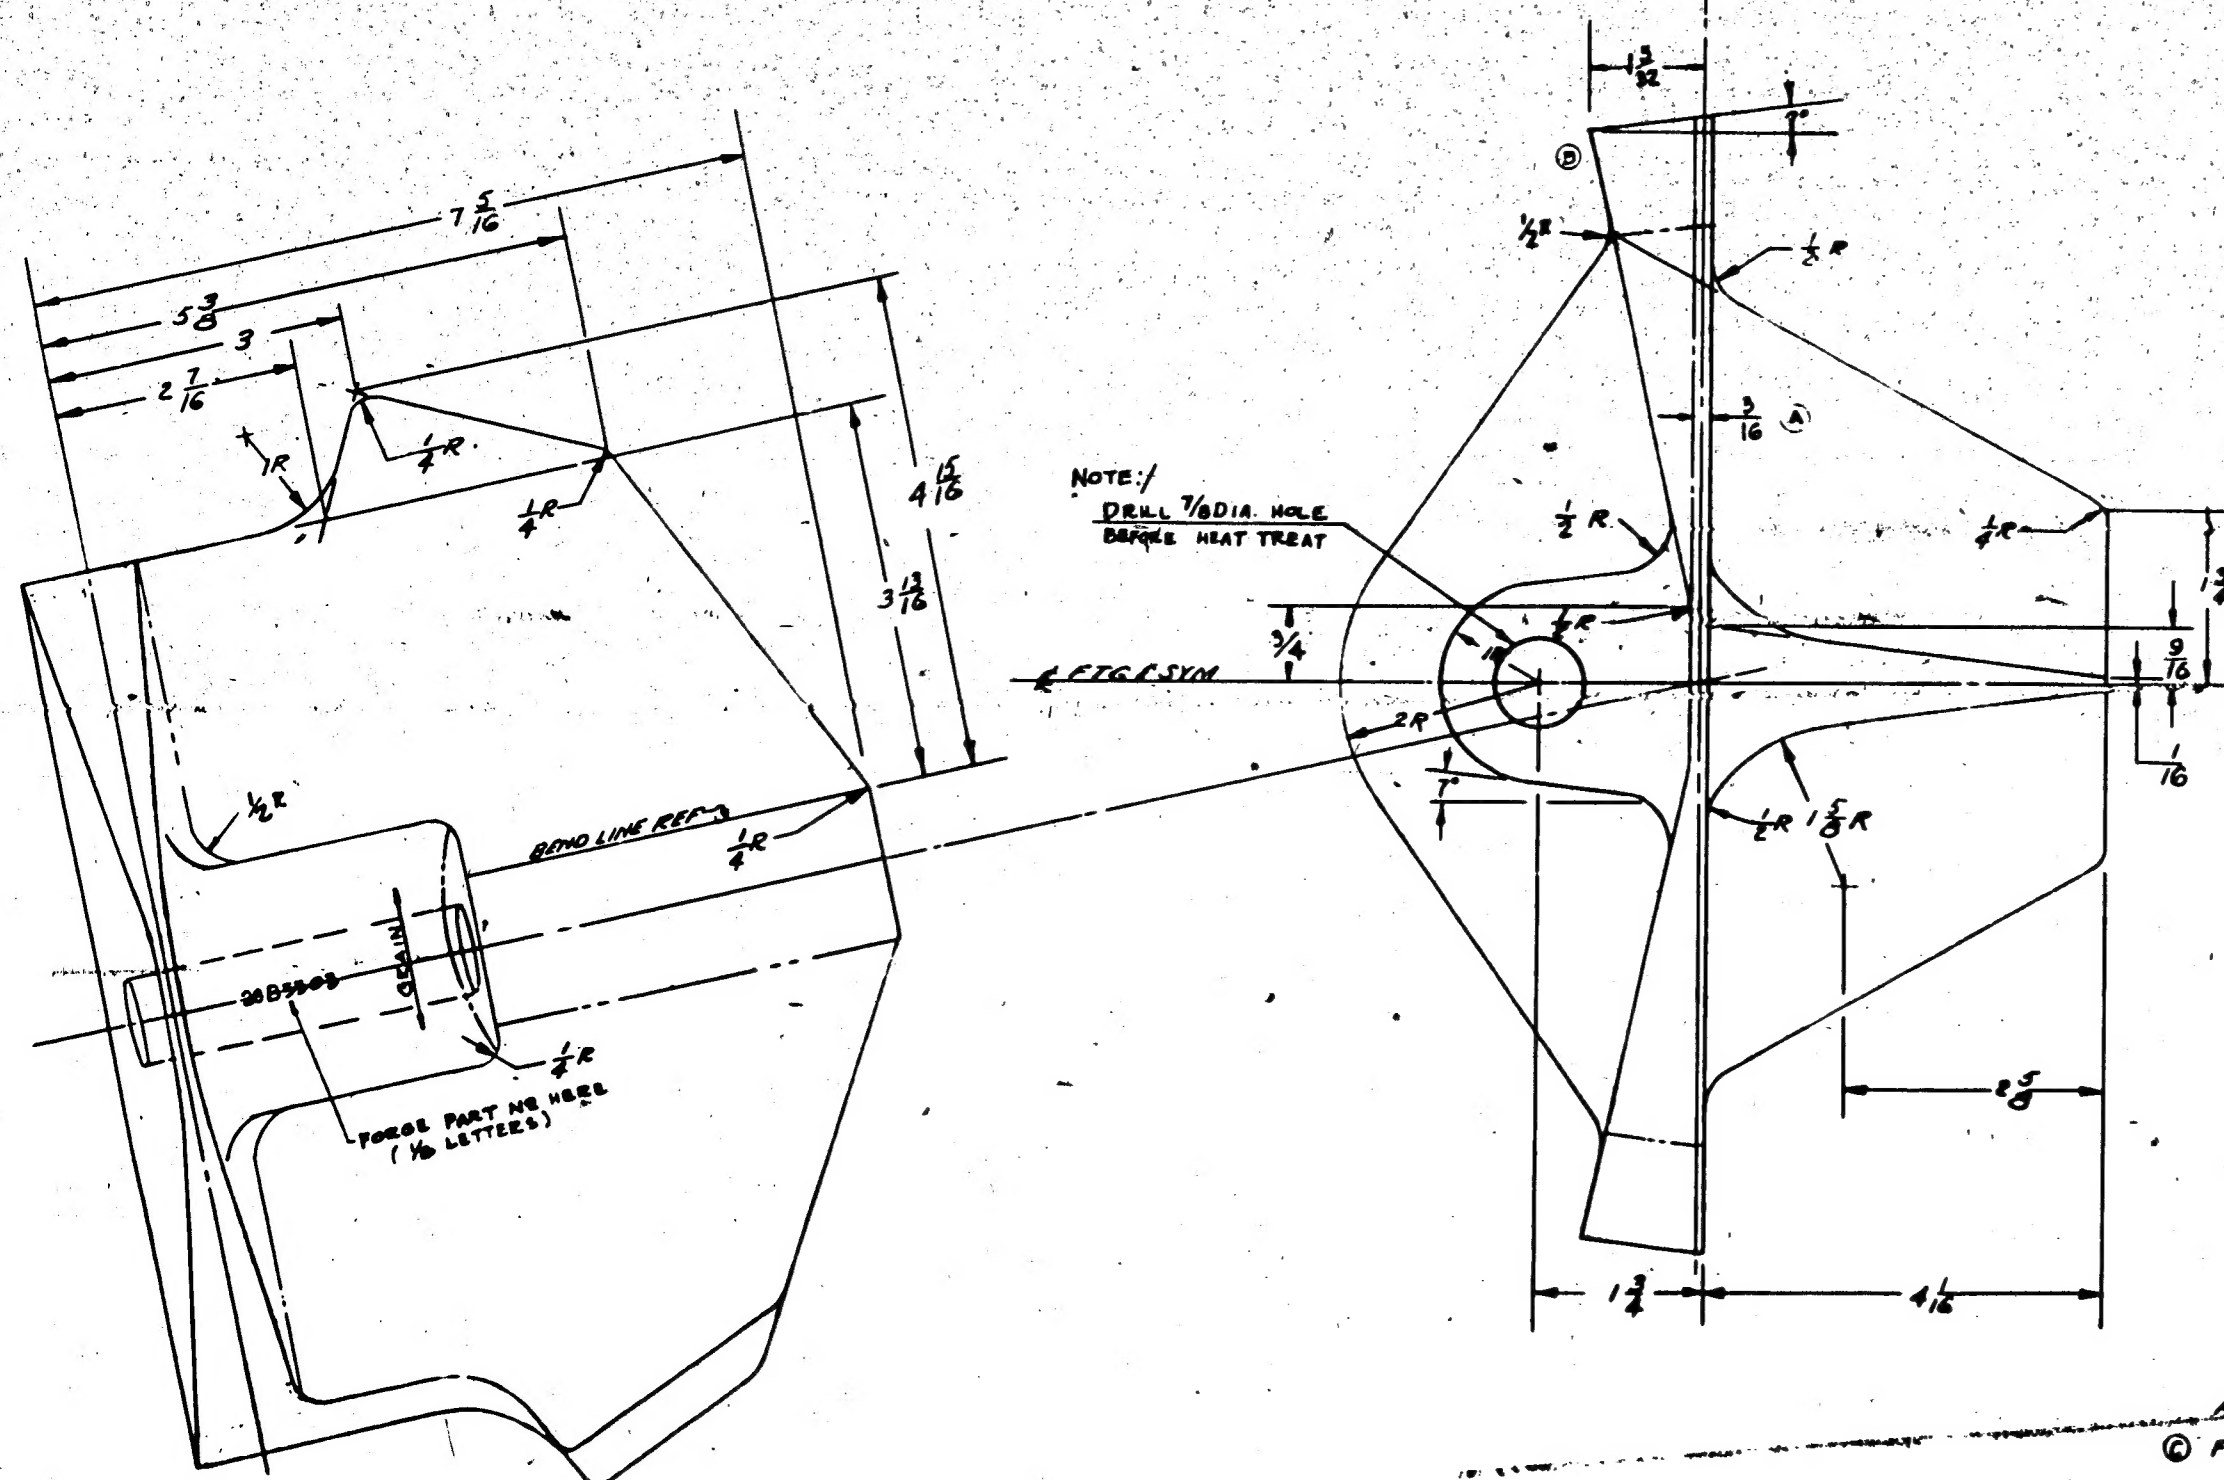
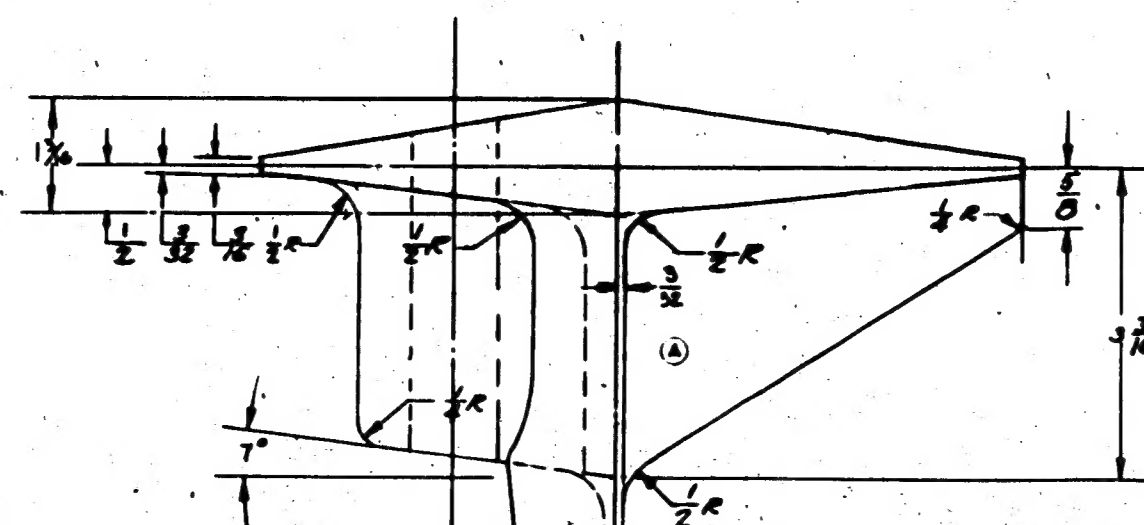


[illegible]

FINISH  
SB-SAND BLAST

**NOTE**

ALL CORNERS TO HAVE  $\frac{1}{16}$ "  
 (C) FORGING TOL.  $\frac{1}{16}$  -  $\frac{1}{32}$   
 PARTS TO BE ANNEALED BY VENDOR, TOSS  
 HEAT TREATED TO 175,000 P.S.I. BY PURCHASER  
 (C)  
 14130 CHROME MOLY. AN-99-3084  
 14135 CHROME MOLY. - ACCEPTABLE  
 MATERIAL.

[illegible]

H 137